

Automatic EVs Isolation

Tanfil 100 Tangential Flow Filtration System

- ▶ Ultimate Simplification
- ▶ Multi-purpose
- ▶ Fast & Economical



Features



1 Ultimate simplification

- ◆ Integrated with pump, liquid reservoir and pressure gauges. Plug the tube, add samples and start processing.
- ◆ Buffer auto-refill, ensure continuous diafiltration with lowest impact.



2 Multi-purpose

- ◆ TFF technique enables concentration and diafiltration at same run.
- ◆ Easy scale-up. Use same parameters and conditions from trial to mass production.



3 Fast & Economical

- ◆ Acquire high concentration products much faster than traditional systems.
- ◆ No more membrane foulings, longer life of filtration membranes.





Certification

CE / RoHS

Applications

- ◆ Extracellular Vesicles (EVs), exosome isolation
- ◆ Biomolecules separation and purification, such as DNA, RNA
- ◆ Desalting and buffer exchange

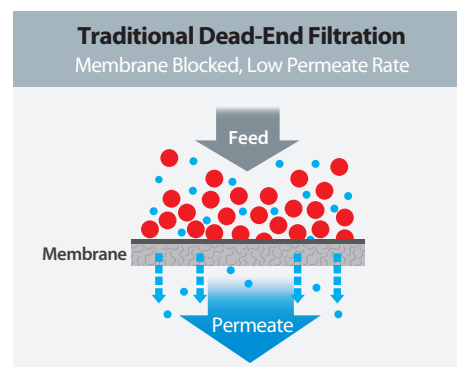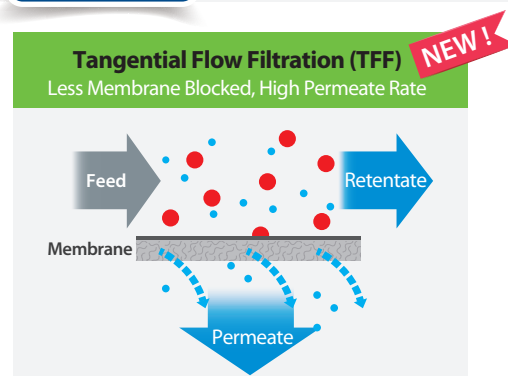



Material			
Reservoir	PES	Gauge wetted parts	SS316
Reservoir lid	PP	Gauge mounting block	PP
Reservoir O-ring	Silicone	Luer fittings	SS316, PP
Magnetic stir bar	PTFE Coated	Luer fitting O-ring	Silicone
Three-way valves	PC, PE	Tubing	TPE, Platinum-cured silicone

Specification

Model	Tanfil 100
PERFORMANCE DATA	
Max. inlet pressure	60 psig
Max. gauge pressure	80 psig
Recirculation flow rate	0 ~ 460 mL/min
Min. recirculation volume	7 mL
Reservoir	PES Reservoir, 500 mL
Noise level	55 dB
Net weight	7.8 Kg
Dimension (LxWxH)	28 x 33 x 16 cm
ELECTRICAL DATA	
Power input	100-240V
Frequency	50 / 60Hz
Max. power	50W
Safety	Motor Overload Protection, Fuse
OTHER DATA	
Applicable capsules	• Pall, Minimate™ TFF Capsules • Sartorius, Sartocoon Slice 50 • Merck, Pellicon® XL 50 Device Contact us for capsule compatibility of others.

TFF Capsule

• Pall Minimate™ Tangential Flow Filtration Capsules (1/pk)

• Membrane Material: Omega (PES), Effective Filtration Area: 50 cm²

Catalog number	MWCO	Catalog number	MWCO
PALOA001C12	1K	PALOA070C12	70K
PALOA003C12	3K	PALOA100C12	100K
PALOA005C12	5K	PALOA300C12	300K
PALOA010C12	10K	PALOA500C12	500K
PALOA030C12	30K	PALOA990C12	1000K
PALOA050C12	50K		

• HansaBioMed TFF Hollow Fibers (1/pk)

• Recommend for Extracellular Vesicles (EVs) Research.

Catalog number	Description	Pore size
HBM-TFF1	TFF-Easy Polysulfone hollow fibers	5 nm
HBM-TFFMV	TFF-MV Polyethersulfone hollow fibers	150 nm
HBM-TFFEVS-S	TFF-EVs Polyethersulfone hollow fibers	50 ± 10 nm



Ordering Information

184100-01(02)	Tanfil 100, Tangential Flow Filtration System, AC100-240V, 50/60Hz, US plug (EU plug)
203100-01(02)	MS 100, Low Profile Magnetic Stirrer with AC100-240V adaptor, US plug (EU plug)
203100-10	PTFE Magnetic Stirring Bar, Ø 3.6 x 25 mm
184100-47	TYGON®, Sani-Tech® Ultra-C Platinum-cured Silicone Tubing, ID 1/8" x OD 1/4", 50 ft
184100-48	Pharmed® BPT Tubing, ID 1/8" x OD 1/4", 25 ft

Rocker Scientific Co., Ltd.

Headquarter

19F.-6, No.206, Guanghua 1st Rd., Lingya Dist.,
Kaohsiung City 802, Taiwan (R.O.C.)
T/ +886-7-227-3358 F/ +886-7-227-3716

Taipei office

11F., No. 402, Sec. 1, Ren'ai Rd., Linkou Dist.,
New Taipei City 244014, Taiwan (R.O.C.)
T/ +886-2-2603-3311 F/ +886-2-2603-6622

Get more information for Rocker

www.rocker.com.tw
export@rocker.com.tw

